


FERRITE CORE | UU-Core

磁芯品名规则说明 (例)
SMP40 UU79/129/31
 材质 磁芯形状

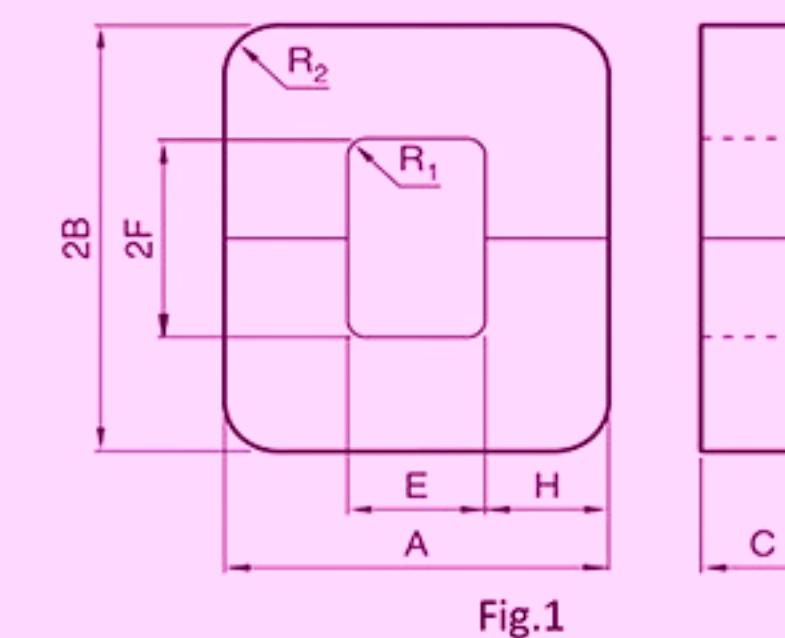

NO.	品名		形状	尺寸规格(Unit : mm)								磁芯常数	实效截面面积	最小实效截面面积	实效磁路长度	实效体积	重量	电气特性		IEC 63093-参考名称	
	磁芯形状	材质		A	B	C	E	F	H	R1	R2							Cl	Ae		Aemin
1	UU9.7	SMH52	Fig.1	9.7±0.15	14.7±0.3	2.8±0.1	3.9	8.6±0.3	2.8±0.1			4.280	8.08	7.84	34.55	279	2.85	900±25%			
		SMH72																840min			
2	UU10.5	SMP40	Fig.1	10.5±0.3	15.6±0.5	5.0±0.2	5.2	10.5±0.5	2.5±0.3			3.170	12.50	12.50	40.30	504	5	1090±25%			
		SMP47																1500±25%			
3	UU79/129/31	SMP40	Fig.1	79.0±2.5	129.0±2.5	31.5±1.0	34	85.0±1.5	22.0±1.0	5	22	0.446	693.00	682.00	309.00	214220	1103	7600±25%			
		SMP95																7600±25%			
4	UU100/151/30	SMP40	Fig.1	100.0±3.0	151.0±2.5	30.0±1.0	39	90.0±1.5	30.0±1.5	5	30	0.388	915.00	900.00	355.00	324860		1630	6990±25%		
		SMP90																1664	6686±25%		
		SMP95																1664	10000±25%		
5	UU101/115/25	SMP40	Fig.1	101.0±3.0	115.0±2.5	25.4±1.0	50	64.0±1.5	25.0±1.0	5	25	0.478	648.00	635.00	309.00	200350		1000	5640±25%		
		SMP90																1021	5395±25%		
		SMP95																1021	8200±25%		
		SMP40																1240	3960±25%		
6	UU100/100/30	SMP40	Fig.1	100.0±1.5	100.0±1.5	30.0±1.0	39	100.0±1.5	30.0±1.5	5	30	0.690	600.00	600.00	360.00	217700		1266	5700±25%		
		SMP90																1095	4500±25%		
		SMP95																1118	4304±25%		
		SMP40																1118	6500±25%		
7	UU80/150/30	SMP95	Fig.1	80.0±2.5	150.0±2.5	30.0±1.0	39	110.0±1.5	20.0±1.0	1	0	0.605	600.00	600.00	363.00	217700		1266	5700±25%		
		SMP40																1095	4500±25%		
		SMP90																1118	4304±25%		
		SMP95																1118	6500±25%		