


FERRITE CORE | POT-Core

磁芯品名规则说明 (例)
SMP40 P9/5 - Z 或 A200

材质 磁芯形状 AL 值 (Z: 无气隙 A200:AL 值为200nH/N²)

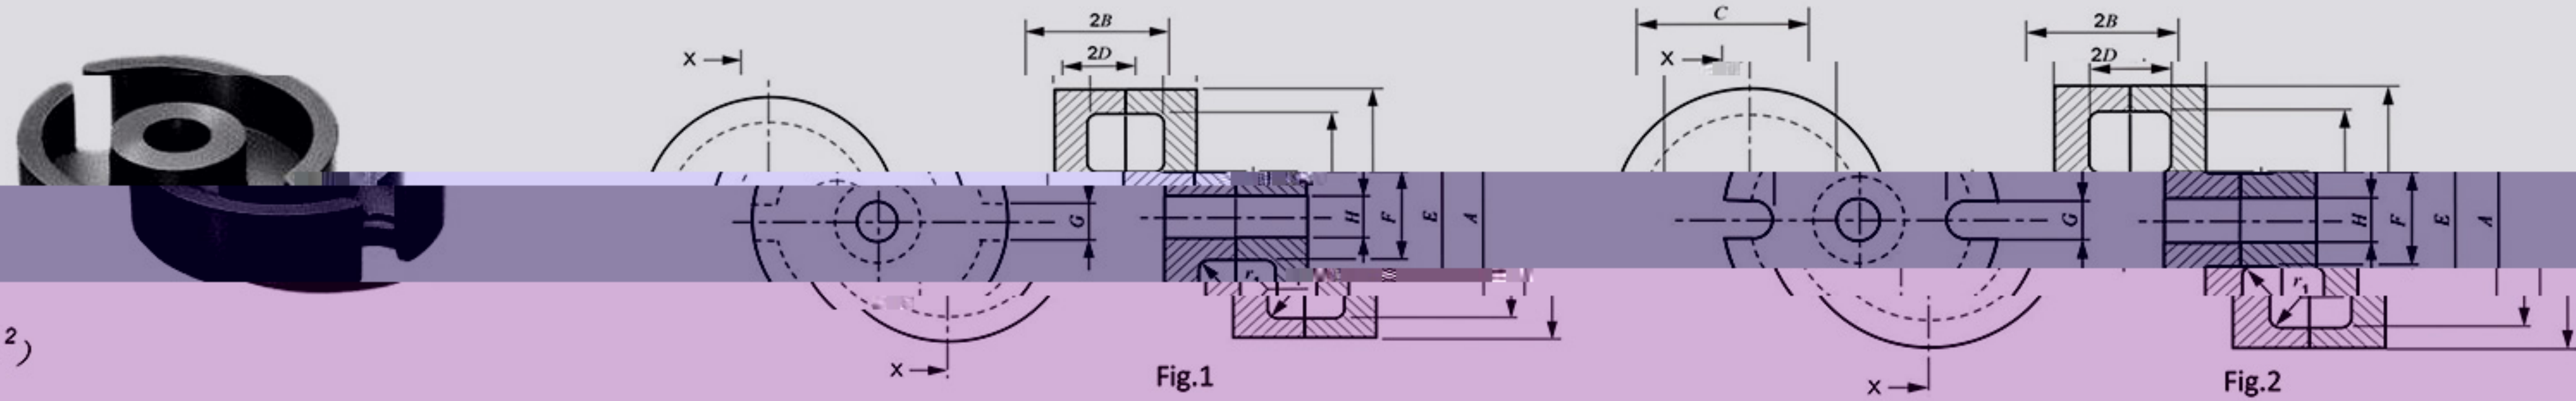

NO.	品名	形状	尺寸规格 (Unit: mm)	图号	A	E	F	G	H	2B	2D	C	L ₁	A _{ae}	A _{min}	L _e	V _{ve}	W _{weight}	电气特性		IEC		
																			常数	面积		面面积	长度
1	P3.3/2.6	SMP40	Fig.1	3.24±0.06	2.55±0.05	1.35±0.05		2.55±0.05	1.8±0.1	1.05	3.136	1.77	1.43	5.56	9.87	0.1							
2	P4.6/3.1	SMP40	Fig.1	4.5±0.1	3.575±0.075	1.95±0.05		3.05±0.05	2.2±0.1	1.4	2.088	3.43	2.60	7.16	24.6	0.3							
3	P5.8/3.3	SMP40	Fig.1	5.225±0.075	4.55±0.05	2.45±0.05		1.00±0.05	3.25±0.05	2.3±0.1	1.7	1.632	4.73	3.66	7.72	36.5	0.4					490min	
4	P7/4	SMP40	Fig.1	7.25±0.10	5.875±0.075	2.9±0.1		1.10±0.05	4.05±0.05	2.9±0.1	1.9	1.358	7.27	5.79	9.88	71.9	0.6					600min	
5	P9/5	SMP40	Fig.2	9.15±0.15	7.65±0.15	3.8±0.1		1.1±0.1	5.25±0.15	3.75±0.15	2.2	1.215	10.20	7.88	12.40	126	0.8					690min	
6	P11/7	SMP40	Fig.2	11.1±0.2	9.2±0.2	4.6±0.1		1.2±0.1	6.45±0.15	4.55±0.15	2.2	0.942	16.40	13.32	15.50	234	1.0					850min	
7	P14/8	SMP40	Fig.2	14.05±0.25	11.8±0.2	5.9±0.1		3.1±0.1	8.35±0.15	5.8±0.2	2.2	0.766	25.60	19.80	19.60	502	3.2					825min	
8	P18/11	SMP40	Fig.2	18.0±0.4	15.15±0.25	7.45±0.15		4.1±0.1	10.55±0.15	7.4±0.2	2.2	0.570	44.50	26.00	25.80	1150	6.7					1020min	